

**Office of the Dean Research and Development
Indian Institute of Engineering Science & Technology (IEST), Shibpur,
Howrah-711 103**

Project Code: DRC/MNRE/CEGESS/HS/006/11-12

**Centre of Excellence for Green Energy & Sensor Systems
Indian Institute of Engineering Science & Technology (IEST), Shibpur
Howrah-711 103**

Notice Inviting Quotations

Sealed quotations are invited for the supply of **Item 1. Screen, & Item 2. Asahi VU Glass** as per the following technical specification. The relevant technical specification can be downloaded from the website. The document can be also obtained from the Centre of Excellence for Green Energy & Sensor Systems (contact: Prof. H. Saha) between 10.30 a.m. and 3.00 p.m. on all working days. The invitation is valid for 7 working days from the date of publication of this notice.

Dean (R & D)

(A. Code DRC-T047/16-17)

SECTION I: TERMS & CONDITIONS


1. The last date of receipt of quotation is valid **for 7 Working days** from the date of publication of this notice. Quotations received later will not be entertained under any circumstances.
2. Potential supplier are to submit the quotations in Sealed Cover to the Centre of Excellence for Green Energy & Sensor Systems in the following address:

**Prof. Hiranmay Saha
Chair Professor & Project Investigator
CEGESS
IIEST, Shibpur
Howrah-711103, India**

3. Item name must be mentioned on cover
4. The price quoted should be inclusive of all Taxes in INR, duties and levies. Inclusion of Tax/Levy at a latter stage will not be accepted. Freight, Insurance charges should be clearly indicated.


Specification for Screen

Back screen design

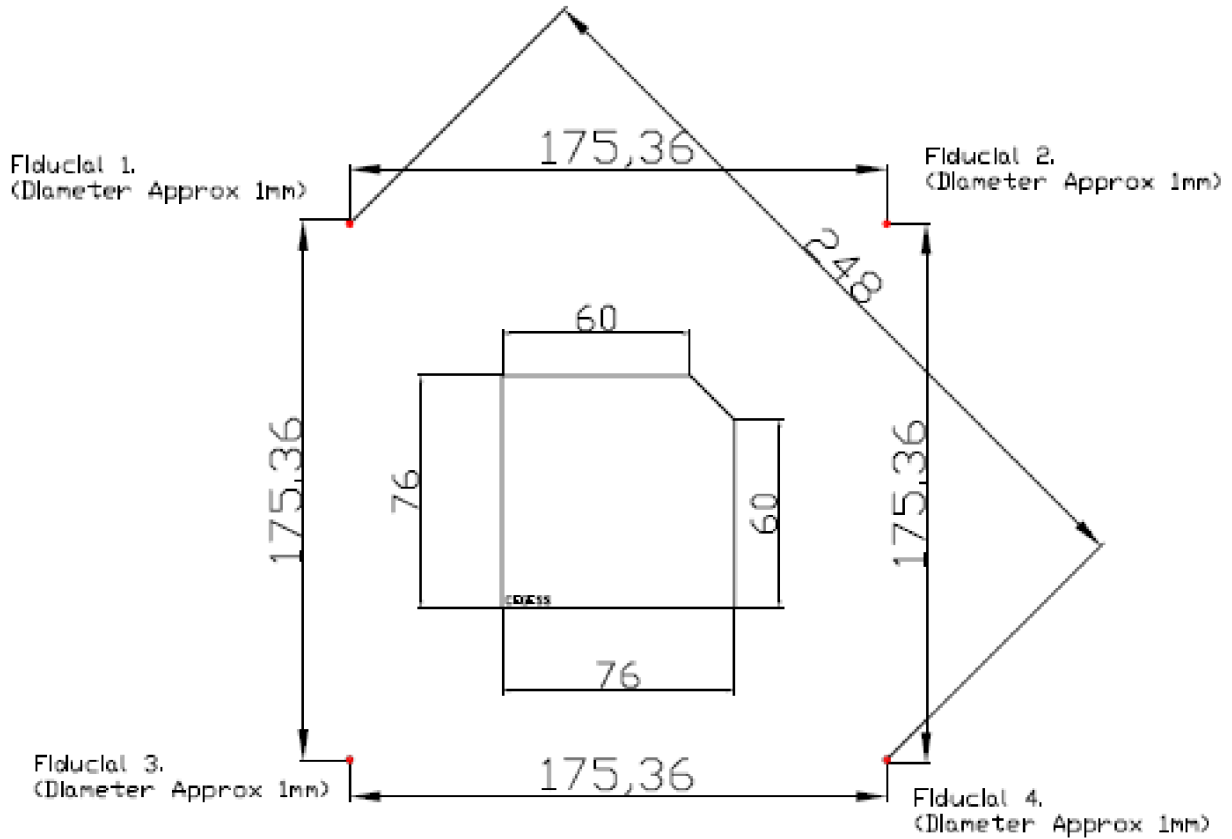

Front screen design

All dimensions are in Millimeter.
Number Busbar 2 nos
Finger Width 0.03mm.
Busbar Width 1.50mm.
C-C distance b/w Fingers 1.515 mm.
C-C distance b/w Busbars 38 mm.
Height of Finger 76 mm.
No. of fingers along y-axis=51

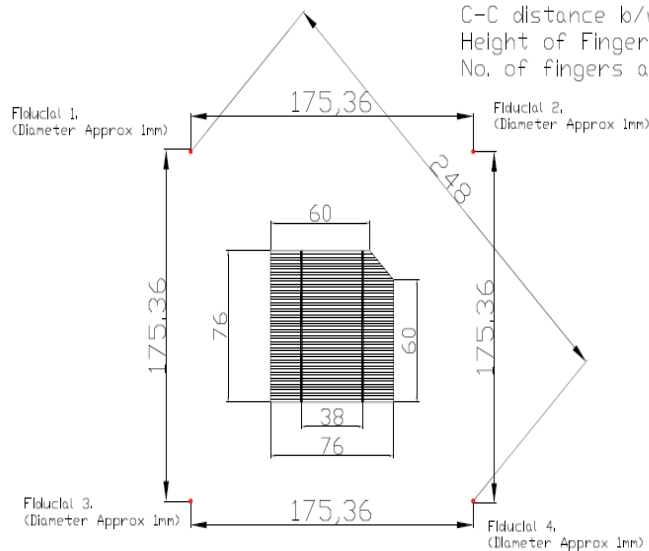

Technical Specification (Asahi VU Glass):

Transmission (%)	:	86 Averages between 400 and 1000nm
Resistivity (Ohms per square)	:	8 4points method
Haze (%)	:	>10
Softening point (°C)	:	722
Annealing point (°C)	:	552

GLASS CHEMICAL COMPOSITION:

Silicon dioxide (SiO ₂ , %)	:	69 to 74
Sodium oxide (NaO, %)	:	12 to 16
Calcium oxide (CaO, %)	:	5 to 12
Magnesium oxide (MgO, %)	:	0 to 6
Aluminum oxide (Al ₂ O ₃ , %)	:	0 to 3
Trace elements (FeO, etc., %)	:	<1